

ML/MF



CMO VALVES

BIDIRECTIONAL ROUND DAMPER BUTTERFLY VALVE

DESCRIPTION

- Round damper butterfly valve, with bidirectional design.
- Designed for pneumatic transport of air or gases at different temperatures.
- Option of manufacturing wafer type or with bored flanges.
- Watertight integrity between 97% and 100%.
- Option of using an air sealing system to increase watertight integrity up to 100%.
- Various seal and gasket materials available.
- Opening in accordance with **CMO Valves** standard. Other openings upon request.

GENERAL APPLICATIONS

These butterfly damper valves are suitable to work with a wide range of air and gases. They are particularly suitable for controlling the flow of gas in pipelines.

Used mainly in:

- Cogeneration plants
- Electrical power stations
- Energy sector
- Thermal power stations
- Chemical plants

SIZES

From DN80 up to DN3000.

* Larger sizes on request.

Check with **CMO Valves** for the general dimensions of a specific damper butterfly.

WORKING (ΔP)

- The most significant difference between the **ML** and **MF** series is the differential working pressure (P). For lower pressures, choose the **ML** series (Light Butterfly); for higher pressures, choose the **MF** series.
- Maximum standard work pressure is 0.5 bar; greater pressures upon request.

WATERTIGHT INTEGRITY

These standard watertight integrity rate for these **CMO Valves** is between 97% and 99%. 100% watertight integrity can also be obtained using dual swing check systems sealed by air injection (upon request).

JOINT FLANGES

There are two options to secure these valves to the conduit:

- **Flange connection:** The valve is manufactured with wafer type design.
- **Bolting the flanges:** The valve is manufactured with bored flanges.

In both variants, the flange connections and openings are in line with **CMO Valves** standard, although these can be tailored to customer requirements upon request.

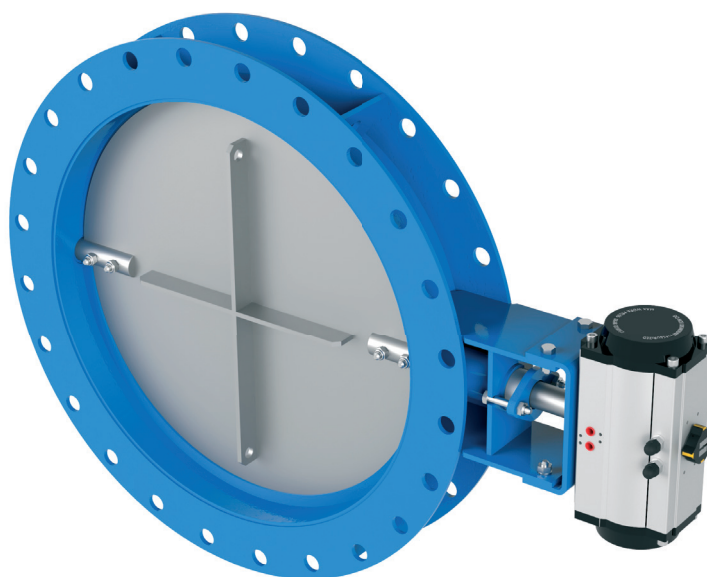


Fig. 1

APPLICATION OF EUROPEAN DIRECTIVES

See document of European Directives applicable to **CMO Valves**.

* For category and zone information, contact technical-commercial department at **CMO Valves**.

QUALITY DOSSIER

All valves are tested at **CMO Valves** and material and testing certificates can be supplied on request.

The watertight integrity of the seat area is measured with gauges

ADVANTAGES

These **ML** or **MF** valves are mechanically welded

The main elements of these butterfly valves are the body (which contains a swing check inside that rotates on two correctly aligned shafts) and the rotation shaft (which is located on the body's central plane) (fig. 2), meaning flow direction is irrelevant, and, therefore, the valve is bidirectional.

The watertight integrity of these valves ranges between 97% and 100%. If the body is designed without sealing flanges, watertight integrity will be 97%. However, better watertight integrity is achieved if half-moon flanges are welded for sealing. There is also the option of mounting a seal system on the half-moon flanges, in order to achieve up to 99.5% watertight integrity.

If 100% watertight integrity is required for temperatures below 200°C, the swing check will have an elastomer gasket bolted to it. Valve design varies for temperatures above 200°C and 100% watertight integrity; a dual swing check is manufactured and an air injection system using a fan is coupled to the body.

The **ML** or **MF** valve body consists basically of a collar of the same interior diameter as the conduit where it is installed, with a flange on each side. If the valve is wafer type, assembly in the conduit is by way of flanges ("sandwich" type) (fig. 3). In the case of bolted flanges, the valve is mounted in the conduit by bolting down the flanges (fig. 4).

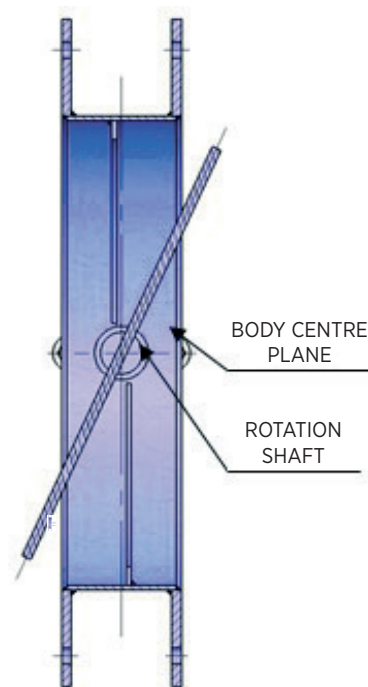


Fig. 2

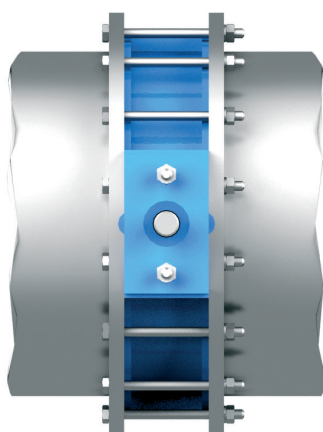


Fig. 3

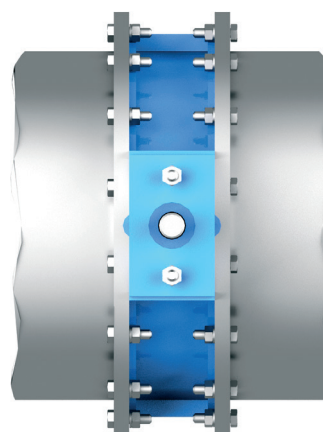


Fig. 4

Both the opening and the boring of the flanges are defined in accordance with **CMO Valves** standards; however, they can also be manufactured in accordance with customer requirements.

These damper butterflies are designed for the rotation shaft to remain in horizontal position, although they can be designed for assembly in other positions upon request.

Since these valves are designed to control the passage of air or gases, these flows are occasionally at very high temperatures. Specific materials are used for high temperatures in order to ensure the valve functions properly under these conditions. The temperature limits for the materials most commonly used by **CMO Valves** are set out in Table 1 below.

There are manual and automatic actuators to operate these valves. In either case, the drive system is positioned far away from the valve when the valve is to work at very high temperatures. Exterior insulation, heat dissipaters or interior insulation based on refractory materials can also be used.

MATERIAL	T [°] MAX	MATERIAL	T [°] MAX
S275JR	250 °C	AISI 304	650 °C
H-II	400 °C	AISI 316	800 °C
16 Mo3	500 °C	AISI 310	1000 °C

Note: Other materiales upon request

Table. 1

The standard components that make up this type of valve are shown below:

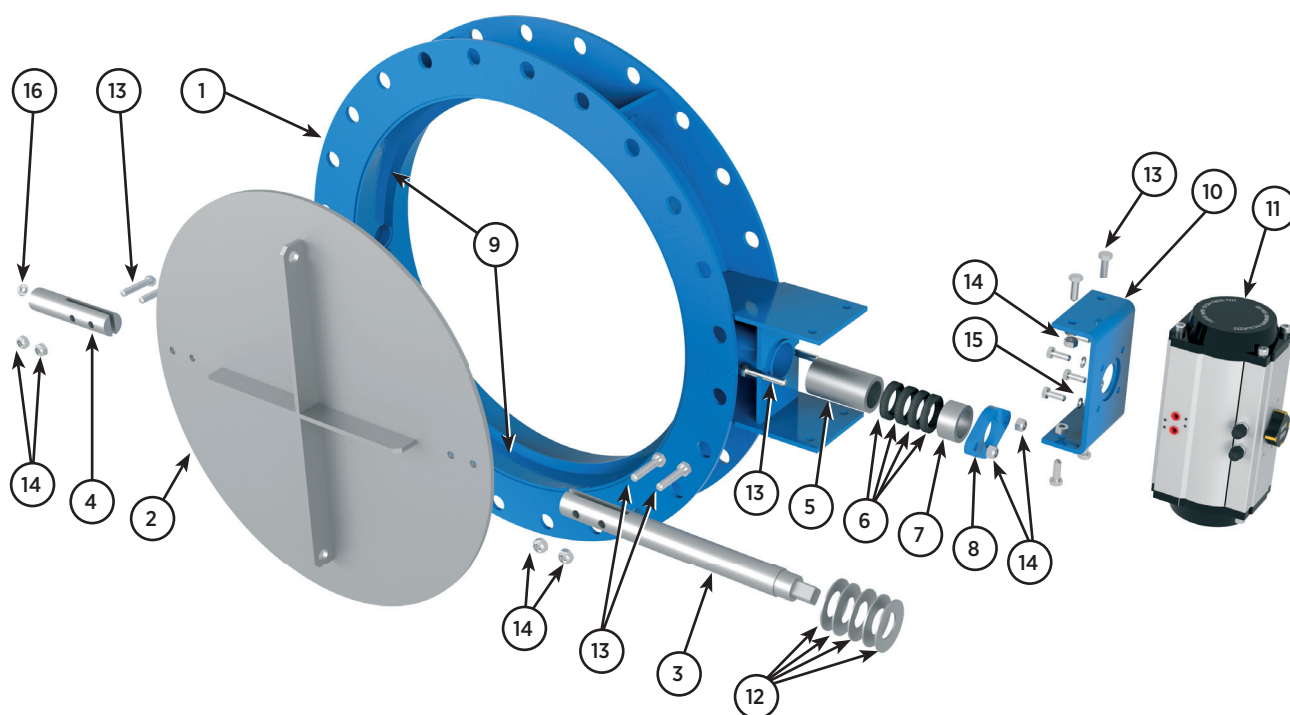


Fig. 5

STANDARD COMPONENTS LIST

POS	COMPONENT	POS	COMPONENT	POS	COMPONENT
1	BODY	7	PRESS BUSHING	13	BOLT
2	SWING CHECK	8	PRESS FLANGE	14	NUT
3	DRIVING SHAFT	9	SEAL (OPTIONAL)	15	WASHER
4	DRIVEN SHAFT	10	SUPPORT WITH BEARING	16	BALL
5	SPACER	11	ACTUATOR		
6	GASKET	12	SPRING DISCS		

Table. 2

DESIGN CHARACTERISTICS

1. BODY

The body of this type of damper butterflies is usually mechanically welded. Its geometry consists basically of a collar of the same interior diameter as the conduit in which it is installed, with a flange on each side. In the case of wafer type valves, these flanges will not include boreholes (fig. 6). When a valve with bored flanges is required (fig. 7), the flanges will be bored in accordance with **CMO Valves** standard, as with the opening dimensions of the body throughout the **ML** and **MF** series. However, both the opening and the flange standard can be tailored in accordance with customer requirements upon request.

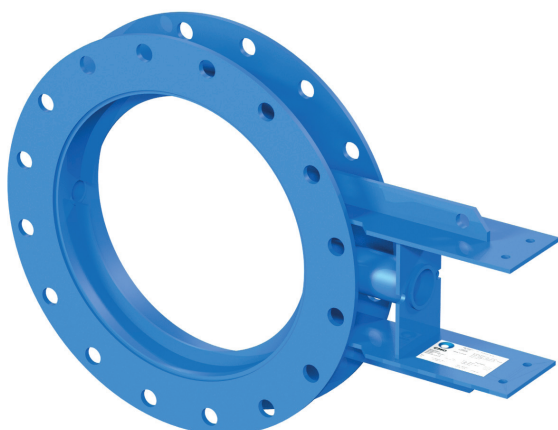


Fig. 6

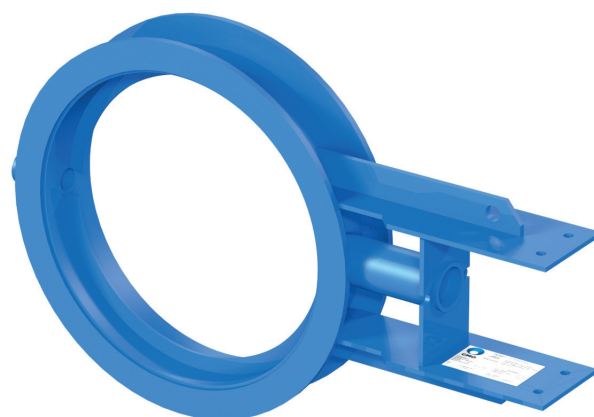


Fig. 7

There are orifices on both sides of the ferrule, with support pieces (pipes) of different sizes and functions welded on the outside (fig. 8 and fig. 9), always perfectly aligned and coinciding with the rotation shaft. The shaft support points (pipes) guide and move the swing check.

The passive shaft (fig. 8) rests on a steel ball, which is embedded in the orifices machined in the cover of this pipe and in the passive shaft itself. Its primary role is to counteract any expansion resulting from high temperatures.

The pipe gland system shown in Figures 5 and 9 is used to ensure watertight integrity in these areas and prevent gas leakage from inside the body. This packing system is composed of multiple packing lines. Watertight integrity between the body and the shafts is achieved by pressing the packing with a flange and a compression sleeve. The choice of packing material depends mainly on the working temperature.




Fig. 8




Fig. 9

The watertight integrity offered by this type of valves is at least 97%. If greater watertight integrity is required, half-moon flanges are welded inside the body, which the swing check closes on to improve sealing (fig. 10). There is the possibility of mounting a seal system on these half-moon flanges, increasing watertight integrity up to 99.5%.

To achieve 100% watertight integrity when the temperature is below 200°C, a bolted elastomer gasket is placed on the swing check, which rests against the flange welded to the body in the valve closure. A double swing check with double seal on the body is manufactured for applications where the temperature exceeds 200°C. Air is injected using a fan, achieving 100% watertight integrity by air sealing.

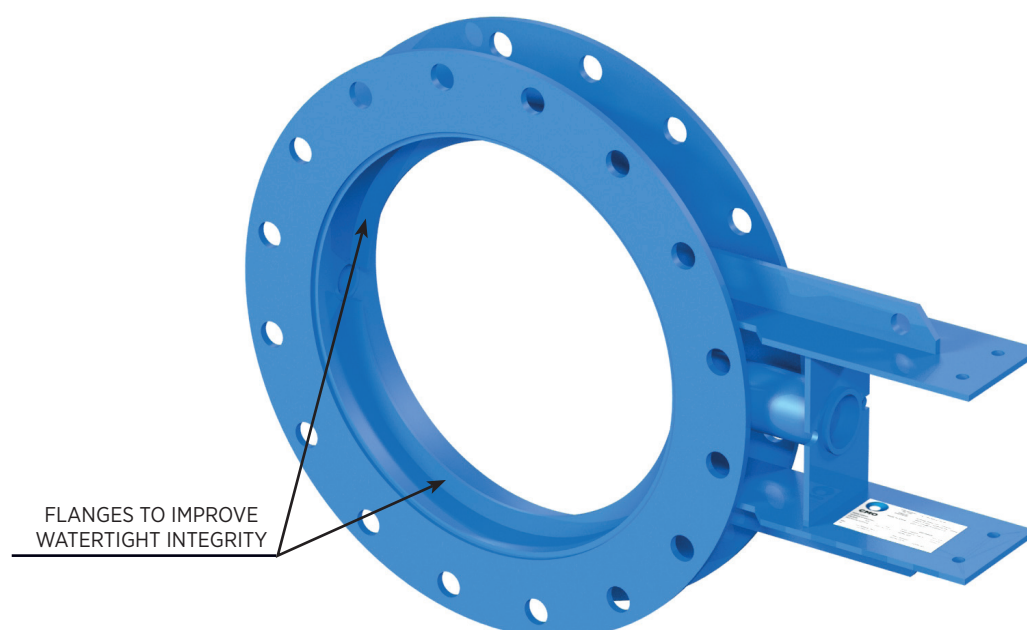


Fig. 10

The manufacturing materials used are selected based on the valve's specific needs and requirements, such as working temperature, pressure, fluid type, and flow dimensions; commonly used materials include: S275JR carbon steel, stainless steel AISI 304, AISI 316, etc.

Other particular materials are also available, such as P265GH steel, 16Mo3, AISI310, etc. Check with **CMO Valves** for any special requirements.

As standard, **CMO Valves** carbon steel gate valves are coated with 80-micron epoxy anti-corrosive protection (RAL 5015). Other types of anti-corrosion and finish protections are available.

2. SWING CHECK

The swing check for these butterfly dampers consists of a circular disc with holes on each side (fig. 11) to insert bolts that hold the swing check to the slotted shafts. The swing check rotates on these shafts, passive shaft and drive shaft. The swing check is designed in accordance with the dimensions of the duct and the work pressure required. When the situation so requires, the disc may have ribs and reinforcements to ensure the necessary mechanical robustness (fig. 12).



Fig. 11

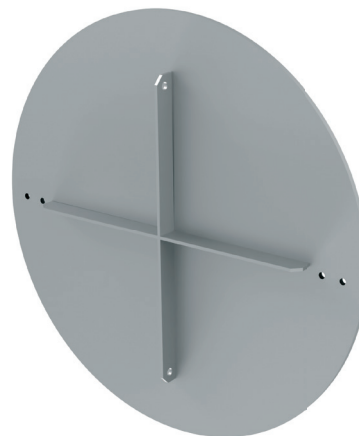


Fig. 12

As mentioned, the design varies from the standard if a valve with 100% watertight integrity is required. When the operating temperature is below 200°C, a half-moon elastomer gasket is bolted to the swing check itself (fig. 13). However, the swing check should be double if the operating temperature is over 200°C, as shown in fig. 14. In this instance, securing the shafts in the swing check requires welding a pipe on both sides, where the shafts are then attached using pins.

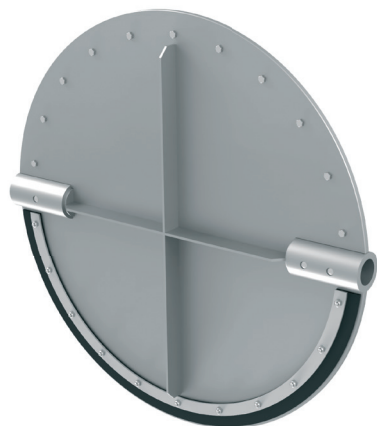


Fig. 13

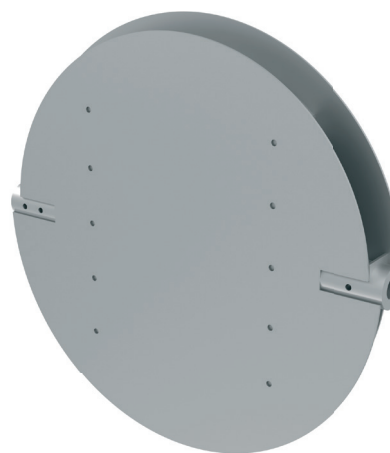


Fig. 14

The swing checks are generally made of the same material as the body, although other materials or combinations can be produced upon request. The materials are chosen in accordance with the requirements of each valve, working temperature, pressure, dimensions, etc. Some of the most commonly used materials are: S275JR carbon steel, stainless steel AISI 304, AISI 316, etc. However, other special materials such as steel H11, 16Mo3, AISI 310, etc., can also be used.

As standard, carbon steel or iron valves are coated with anti-corrosive protection of 80 microns of EPOXY RAL 5015. However, other types of anti-corrosion protections are available.

3. SEAT

Different types of seats are available according to the working application




Fig. 15

SEAT 1:

In this type of seal, there is no contact between the body and the swing check (fig. 15). The estimated leak is 3% of pipe flow. There is a specific clearance (mechanical clearance) between the interior diameter of the body and the exterior diameter of the swing check, in order to ensure the valve can open and close smoothly. We therefore estimate that this type of seal provides watertight integrity of 97%.




Fig. 16

SEAT 2:

Metal/metal seal.

This type of seal includes flanges in the shape of a half-moon welded inside the body. The swing check closes against these flanges, making a metal/metal seal (fig. 16). The estimated leak is 1% of pipe flow. The thickness of these flanges means they can be handled easily in order to adjust the swing check. We therefore estimate that this type of seal provides watertight integrity of 99%.




Fig. 17

SEAT 3:

Metal/gasket seal.

This type of seal includes flanges in the shape of a half-moon welded inside the body. These flanges have a machined recess where the gasket is housed. The swing check closes against this gasket (fig. 17). The estimated leak is 0.5% of pipe flow. There are several materials available for the gasket, chosen mainly in line with the valve's working temperature. We estimate that this type of seal provides watertight integrity of 99.5%.




Fig. 18

SEAT 4:

Metal/gasket seal.

This type of seal includes flanges in the shape of a half-moon welded inside the body. An elastomer gasket and a clamping flange are bolted to the swing check. This gasket closes against the body's weld ring (fig. 18). There are several materials available for this gasket; however, due to the seat design necessitating an elastomer for the gasket seal, the maximum temperature limit for this type of seat is 200°C. This type of seal provides 100% watertight integrity.


SEAT 5:

Air sealed.

This type of seal is particularly special. The valve is designed with a dual seal, which air is injected between to completely separate the gases on both sides of the swing check (fig. 19).

This type of valve requires a dual swing check, which closes against the dual half-moon flange system fitted inside the body. To inject air into the seal, a fan system with a non-return valve is coupled to the body (fig. 20) so gases from the duct cannot escape through the fan pipe when the damper butterfly is open. We therefore estimate that this type of seal provides watertight integrity of 100%.

There is a range of materials for the seal when choosing the seal type described in point "Seat 3" or "Seat 4" (metal/gasket seal).



AIR INJECTION

Fig. 19

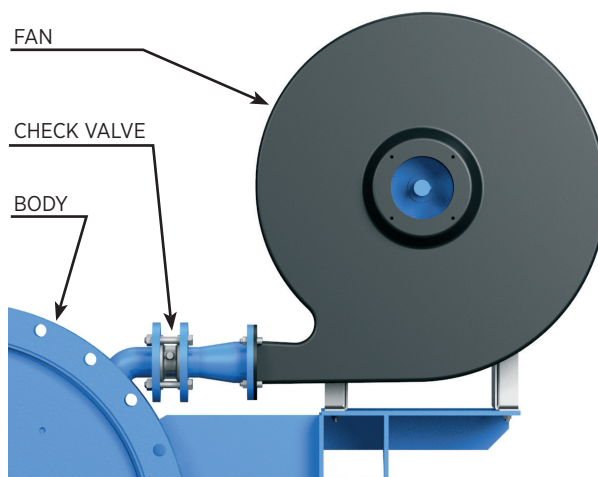


Fig. 20

A summary of the common materials used for the seals described above and their temperature limitations is set out in the table below.

SEAT/SEALS		
MATERIAL	T ³ MÁX (°C)	APPLICATIONS
Metal/Metal	>250 °C	High temperature/Low watertight integrity
EPDM (E)	90 * °C	Water, acids and non-mineral oils
Nitrile (N)	90 * °C	Hydrocarbons, oils and greases
Natural Rubber	90 °C	Abrasive products
FKM (V)	200 °C	Hydrocarbons and solvents
Silicone (S)	200 °C	Food products
PTFE (T)	250 °C	Resistant to corrosion
Graphite	650 °C	High temperatures
Ceramic fibre	1400 °C	Extreme temperatures

Note: More details and other materials available to order

*** EPDM and Nitrile:** possible up to max temp: 120°C to order.

Table. 3

WATERTIGHT SEAL MATERIALS

Different types of seats are available according to the working application:

EPDM

Recommended for temperatures below 90°C (* see note), providing the damper butterfly with watertight integrity of 100% of the pipe flow

NITRILE

Used with gases containing fats or oils at temperatures no higher than 90°C (* see note). Provides the damper butterfly with watertight integrity of 100% of the pipe flow.

NATURAL RUBBER

This can be used in multiple applications at temperatures below 90°C, with abrasive products, and provides the damper butterfly with 100% watertight integrity.

FKM

Suitable for corrosive applications and temperatures of up to 190°C continuously and peaks of 210°C. Provides the damper butterfly with watertight integrity of 99% of the pipe flow.

SILICONE

Used mainly in the food industry and for pharmaceutical products with temperatures no higher than 200°C. Provides the damper butterfly with watertight integrity of 100% of the pipe flow.

PTFE

Suitable for corrosive applications and pH between 2 and 12. Does not provide the damper butterfly with 100% watertight integrity. Estimated leakage: 1.5% of the pipe flow.

GRAPHITE

It can be used in multiple applications up to temperatures of 650°C. It has a wide range of applications, as graphite is resistant to steam, water, oils, solvents, alkalis, and most acids. The damper butterfly can be provided with watertight integrity of 99.5% of pipe flow.

CERAMIC FIBRE

This is a gasket made of ceramic material fibres. It is used mainly with air or gases at high temperatures and low pressures. The damper butterfly can be provided with watertight integrity of 99.5% of pipe flow.

Bronze, hecker, etc., gaskets can also be used depending on the working temperature and the required watertight integrity.

***Note:** In some applications other types of elastomer are used, such as: hypalon, butyl, etc. Please contact **CMO Valves** for any such requirements

4. GASKET

Standard packing (6) in **CMO Valves** comprises several lines or layers of packing material to ensure watertight integrity between the shafts and the body, preventing any leakage to the atmosphere by sealing and compressing the packing with bushings and bolted flanges, as shown in fig 21.

As this system is located in an easily accessible area, the packing can be replaced without disassembling the valve from the line, simplifying maintenance tasks.

Below are several types of packing materials available, based on the application and working conditions of the valve:

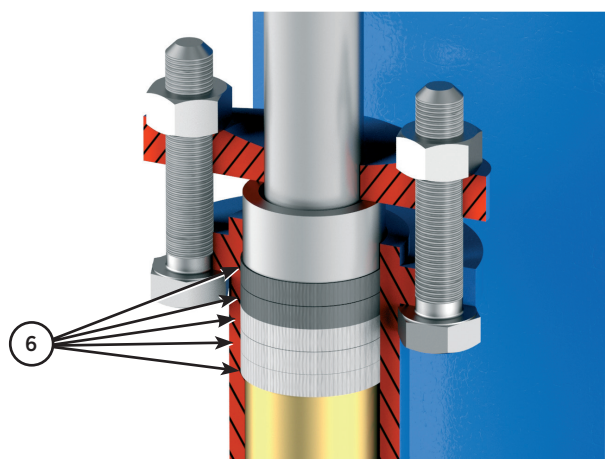


Fig. 21

GREASED COTTON (Recommended for hydraulic services)

This gasket is composed of braided cotton fibres soaked in grease both inside and out. It is for general use in hydraulic applications in both pumps and valves.

DRY COTTON

This gasket is composed of cotton fibres. It is for general use in applications with solids.

COTTON + PTFE

This gasket is composed of braided cotton fibres soaked in PTFE both inside and out. It is for general use in hydraulic applications in both pumps and valves.

SYNTHETIC + PTFE

This gasket is composed of braided synthetic fibres soaked in PTFE both inside and out. It is for general use in hydraulic applications in both pumps and valves and in all types of fluids, especially corrosive ones, including concentrated and oxidising oils. It is also used in gas with solid particles in suspension.

GRAPHITE

This gasket is composed of high-purity graphite fibres. A diagonal braiding system is used and it is impregnated with graphite and lubricant which helps to reduce porosity and improve operation. It has a wide range of applications as graphite is resistant to steam, water, oils, solvents, alkali and most acids.

CERAMIC FIBRE

This gasket is composed of ceramic material fibres. It is used mainly with air or gases at high temperatures and low pressures.

A summary of common packing materials and their limitations is shown in the table below.

GASKET			
MATERIAL	P(bar)	T ^a . Máx. (°C)	pH
Greased cotton	10	100 °C	6-8
Dry cotton (AS)	0,5	100 °C	6-8
Cotton + PTFE	30	120 °C	6-8
Synthetic + PTFE	100	-200 °C+270 °C	0-14
Graphite	40	650 °C	0-14
Ceramic Fibre	0,3	1400 °C	0-14

Table. 4

5. SHAFTS

The shafts of **CMO Valves's ML** and **MF** damper butterflies are solid and manufactured in stainless steel (AISI 304, AISI 316, AISI 310, etc.). These characteristics make it highly resistant and provide excellent properties against corrosion.

A groove is machined in the drive and passive shafts in order to house the swing check, secured by bolts (fig. 22). These bolts therefore transfer shaft movement to the swing check.

The passive shaft is machined with a tapered housing to support a steel ball. This mechanical solution primarily functions as a support or transverse stopper for the moving shaft and swing check assembly, permitting rotation around the swing check. 22).

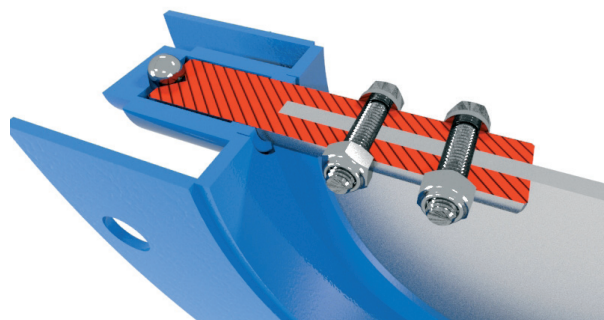


Fig. 22

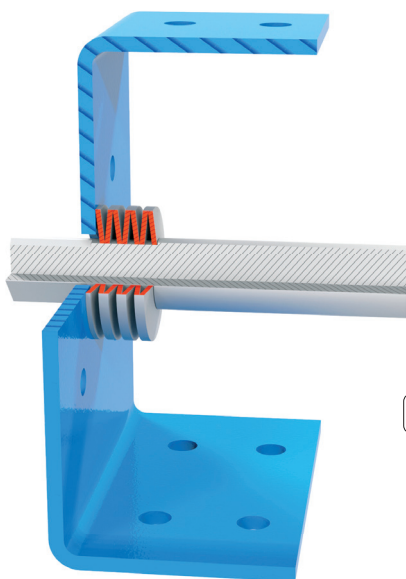


Fig. 23

Meanwhile, a recess machined into the drive shaft accommodates disc washers (springs) which, in turn, rest against the yoke (fig. 23). These disc washers absorb any expansion of the shafts and swing check due to high fluid working temperatures. The system therefore functions as a spring, pushing the moving shafts and swing check against the steel ball within the passive shaft to compensate for material expansion.

The drive shaft depends on the type of drive (actuator) to be installed in the valve for operation; Either the square system (fig. 24) or the keyed shaft (fig. 25). Other solutions on request.

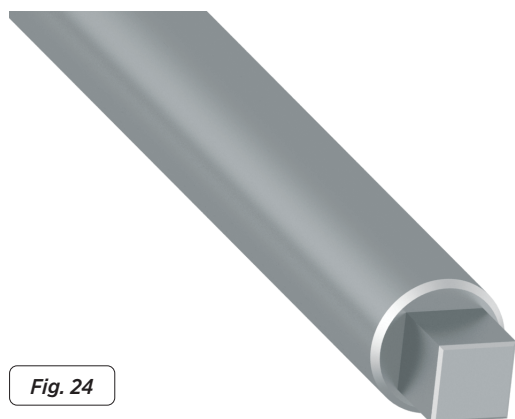


Fig. 24

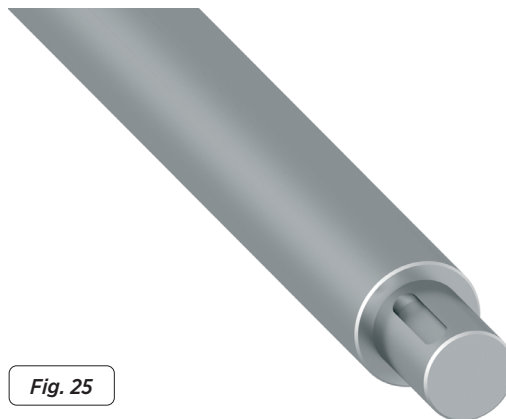


Fig. 25

6. PACKING GLAND

As explained above, a packing system is used to achieve the watertight integrity of the shaft. This comprises multiple gasket lines which are oppressed by way of a flange and press bushing.

The combination of press flange plus packing bushing (7) allows a uniform pressure and force to be applied throughout the gasket, thus guaranteeing there are no leakages between the body and the shafts.

As a general rule, both the press flange and the press (8) bushing are made of stainless steel AISI 316. However, other materials can be used to order.

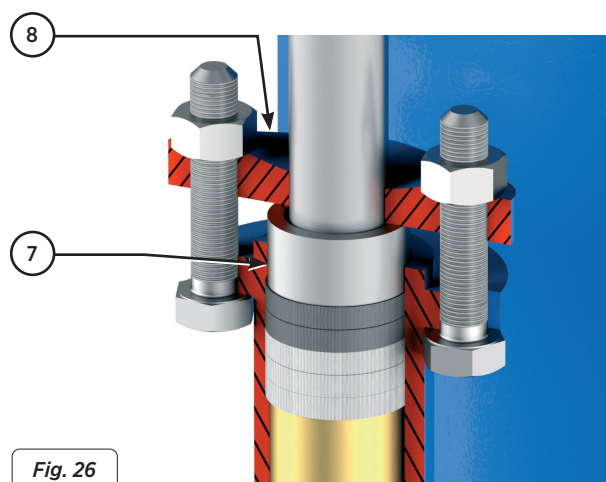


Fig. 26

7. YOKE

The yoke of these damper butterfly valves comprises a folded rectangular metal profile with various holes (fig.27) to mount and secure the drive; simultaneously, the disc washers are supported on the drive shaft, acting as a stopper for the moving swing check and shaft system and allowing material dilatations to be absorbed. The yoke is mounted on the valve body. The yoke fastenings to mount the actuators are normally designed under Standard ISO 5211, although other standards are available on request.

The yoke is typically made of the same material as the body, although it can be manufactured with other materials or combinations upon request. Some of the most commonly used materials are: carbon steel S275JR, stainless steel AISI304, AISI316, etc. We also have other particular materials such as steel P265GH, 16Mo3, AISI310, etc., on request.

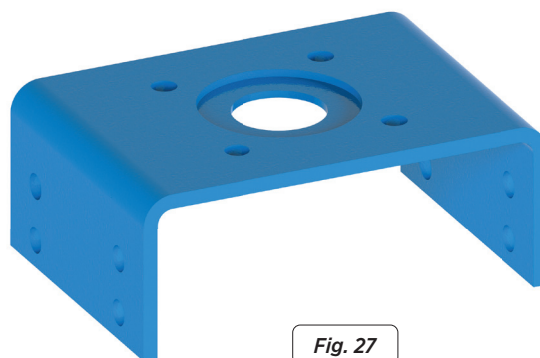


Fig. 27

8. ACTUATORS

The damper butterfly actuator system is located in one of the body support pieces. The actuator is attached to the body and transmits the torque generated to the swing check through the actuating shaft. Our damper butterflies are supplied with several types of actuator, bringing the advantage that, thanks to the **CMO valves** design, they can be interchanged. This design allows customers to change the actuators themselves and no extra assembly accessories are required. The total dimensions of the damper butterfly may vary in accordance with the type of actuator chosen.

Manual Drives

Reducer (fig. 28)

Lever (fig. 29)

Square-head (fig. 30)

...

Automatic Drives

Electric actuator (fig. 31)

Linear pneumatic cylinder (fig. 32) *

¼ Turn pneumatic cylinder (fig. 32) *

Single acting pneumatic cylinder (fig.33) *

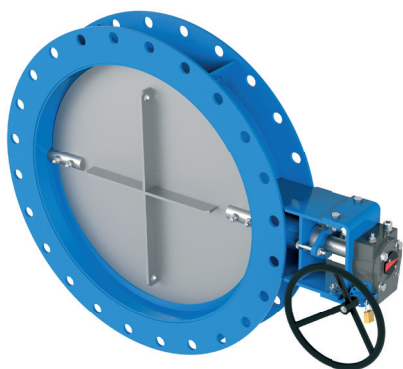


Fig. 28

REDUCER

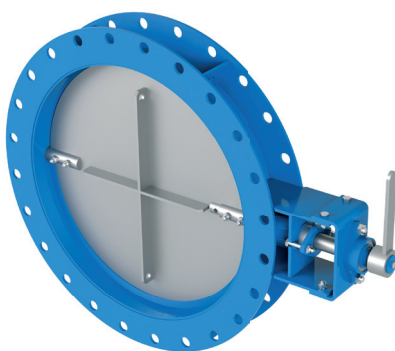


Fig. 29

LEVER

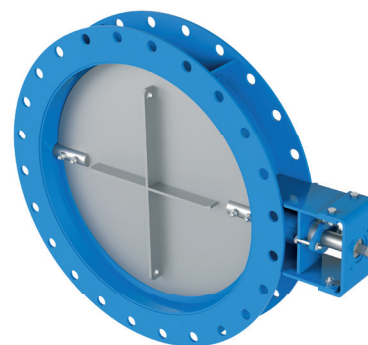


Fig. 30

SQUARE-HEAD

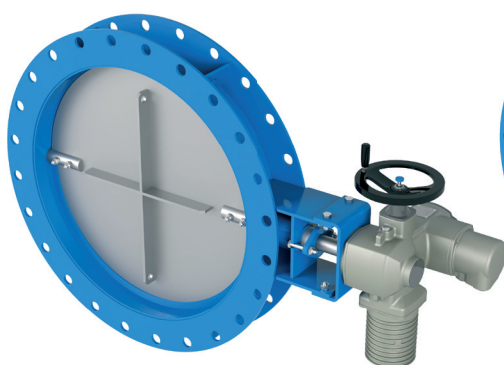


Fig. 31

ELECTRIC-MOTOR
ACTUSTOR

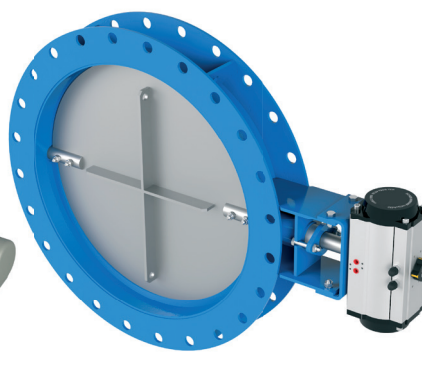


Fig. 32

PNEUMATIC ACTUATOR

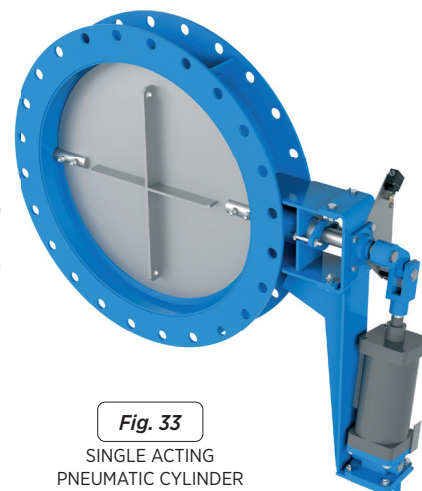


Fig. 33

SINGLE ACTING
PNEUMATIC CYLINDER

* Speed regulators must be included when the damper butterflies are fitted with a pneumatic drive. In these cases the minimum time of each operation (opening or closing) is 6 seconds.

ACCESSORIES AND OPTIONS

Different accessories are available to adapt the damper butterflies to specific working conditions such as:

MIRROR-POLISHED SWING CHECK

The mirror-polished swing check is especially recommended in the food industry and, as standard, in applications in which solids can stick to the swing check. It is an alternative to ensure the solids slide off and do not stick to the swing check.

PTFE COATED SWING CHECK

As with the mirror-polished swing check, this improves the damper butterfly's resistance to products that can stick to the swing check.

STELLITED SWING CHECK

This consists of providing stellite in the swing check sealing area to protect it from abrasion.

SCRAPER IN THE GASKET

Its function is to stop the passage of harmful particles and prevent damage to the gasket.

AIR INJECTION IN THE GASKET

By injecting air in the gasket, an air chamber is created which improves the watertight integrity.

CASED BODY

Recommended in applications in which the fluid can harden and solidify inside the valve's body. An external casing keeps the body temperature constant, preventing the fluid from solidifying.

FLUSHING HOLES IN BODY

Several holes are drilled in the body to flush air, steam or other fluids out with the aim of cleaning the valve seat before sealing.

MECHANICAL LIMIT SWITCHES, INDUCTIVE SWITCHES AND POSITIONERS

Installation of limit switches or detectors to indicate specific valve position, and positioners to indicate continuous position.

ELECTROVALVES

For air distribution to pneumatic actuators.

CONNECTION BOXES, CABLING AND PNEUMATIC PIPING

Units supplied fully assembled with all the necessary accessories.

MECHANICAL STROKE LIMITERS (MECHANICAL STOPS)

These are used to mechanically adjust the movement, limiting the turning required of the damper butterfly swing check.

MECHANICAL LOCKING SYSTEM

Allows the valve to be mechanically locked in a set position for long periods.

EMERGENCY MANUAL ACTUATOR (HANDWHEEL/GEARS)

Allows manual operation of the damper butterfly in the event of power or air failure

INTERCHANGEABLE ACTUATORS

All actuators are easily interchangeable.

EPOXY COATING

All stainless steel bodies and components of **CMO Valves**'s damper butterflies are coated with a layer of EPOXY, which makes them resistant to corrosion and gives an excellent surface finish.

CMO Valves's standard colour is blue RAL-5015.

OPTIONS FOR HIGH TEMPERATURES

If a damper butterfly is required to work at high working temperatures, there are different options available in line with the temperature and the space for the valve.

1- ELONGATED SUPPORTS (fig. 34):

When the damper butterfly has to work at high temperatures, there is the option of elongating the body supports. This moves the bearings and the actuator away from the source of heat, protecting them from possible damage due to the high temperatures of the conduit.

Whenever the valve is fitted with a manual actuator, this allows the operator to use it without any risk of burns.

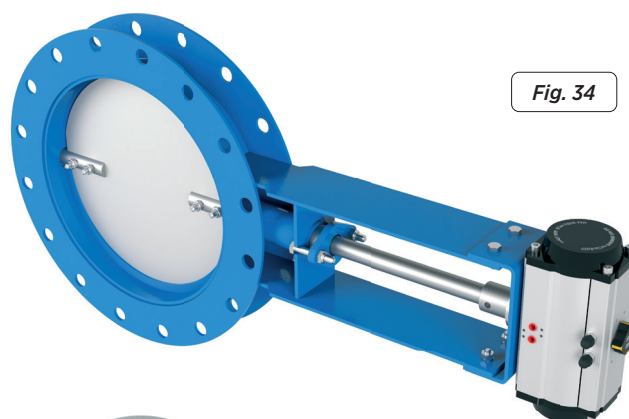


Fig. 34

2- INSULATION (fig. 35):

Whenever the damper butterfly has to work at high temperatures and it is necessary to avoid unnecessary loss of heat through the valve, e.g. to maintain optimum performance of the facility, there is the option of protecting the valve body with exterior insulation.

Sufficient free space is left around the body in order to fit the insulation whenever the customer deems appropriate. The packing, bearings and drive systems therefore remain easily accessible and maintenance work can be carried out without having to remove the insulation.

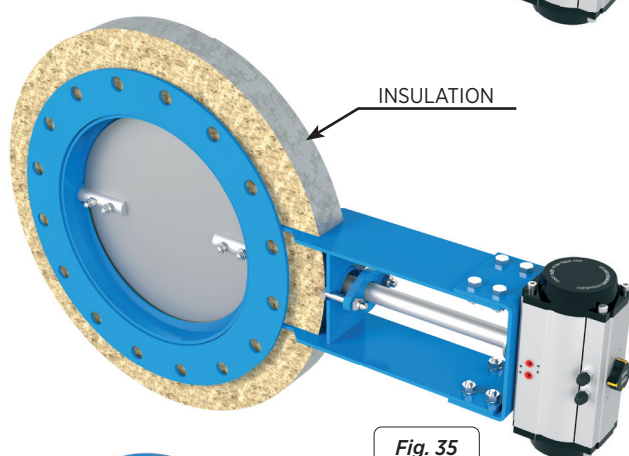


Fig. 35

3- HEAT DISSIPATERS (fig. 36):

Heat dissipaters are installed in facilities in which the valve works at high temperatures and there is not enough space to extend the body support pieces (or the length required is greater than normal). They are installed principally in the shafts, since they are solid and have great thermal conductivity.

The aim is to dissipate the heat and bring the temperature of the shafts down in the areas where the bearings and the actuator are assembled. This allows them to work at a lower temperature, causing less wear and tear and extending their working life.

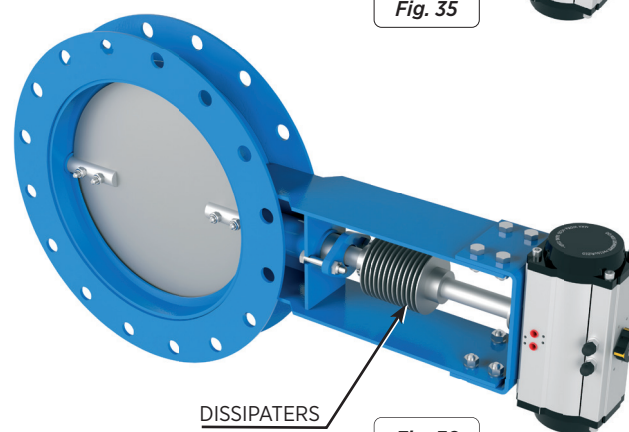


Fig. 36

4- INTERIOR INSULATION (fig. 37):

This type of damper butterfly is occasionally installed in conduits where the working temperature is very high. It may be the case that the temperature is too hot for the option of fitting insulation or that the valve is to be installed as close as possible to the source of heat. In these cases the inside of the body can be insulated with refractory material.

In valves which use this system, the diameter of the collar in the body is usually significantly larger than the nominal diameter of the conduit. The reason for this characteristic is that the refractory insulator is attached to the interior surface of the collar in the body. In consequence, higher temperatures will require higher quantities of refractory material. For this reason, the difference between the nominal diameter of the conduit and the diameter of the body must be larger.

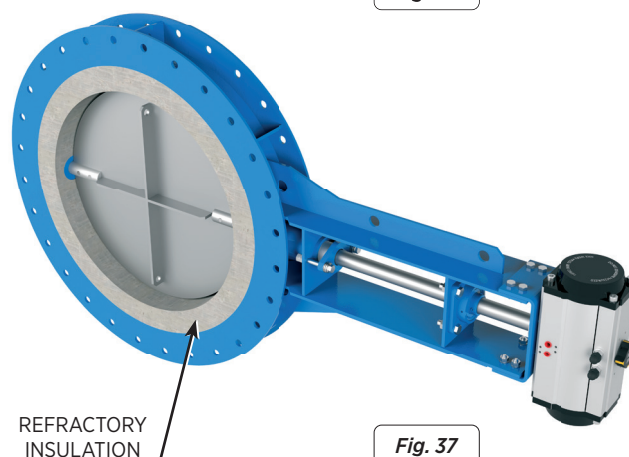


Fig. 37

GENERAL DAMPER BUTTERFLY DIMENSIONS

As indicated previously, the openings and general dimensions of **ML** and **MF** damper butterflies are defined in accordance with **CMO Valves** standard. A table is included with these measurements (table 5). However, since these valves depend on multiple variables, such as work pressure, temperature, nominal diameter of the conduit, etc., we recommend checking with **CMO Valves** for the dimensions of a specific damper butterfly.

DN	A	ØB	C	ØD	ØE
80	100	180	4	140	14
100	100	200	4	160	14
125	100	225	8	185	14
150	100	250	8	210	14
200	100	300	8	260	14
250	100	350	12	310	14
300	100	400	12	360	14
350	100	450	12	410	14
400	100	500	16	460	14
450	100	550	16	510	14
500	100	600	20	560	14
550	140	670	20	620	18
600	140	720	20	670	18
650	140	770	20	720	18
700	140	820	24	770	18
750	140	870	24	820	18
800	140	920	24	870	18
850	140	970	24	920	18
900	140	1020	24	970	18
950	140	1070	24	1020	18
1000	180	1140	28	1080	18
1050	180	1190	28	1130	18
1100	180	1240	28	1180	18
1200	180	1340	32	1280	18
1300	200	1450	32	1380	18
1400	200	1550	36	1480	18
1500	200	1650	36	1580	18
1600	300	1800	40	1710	23
1700	300	1900	40	1810	23
1800	300	2000	44	1910	23
1900	300	2100	44	2010	23
2000	400	2220	48	2120	23
2100	400	2320	48	2220	23
2200	400	2420	52	2320	23
2300	400	2520	52	2420	23
2400	400	2620	56	2520	23
2500	400	2720	56	2620	23
2600	400	2820	60	2720	23
2700	400	2920	60	2820	23
2800	400	3020	64	2920	23
2900	400	3120	64	3020	23
3000	400	3220	68	3120	23

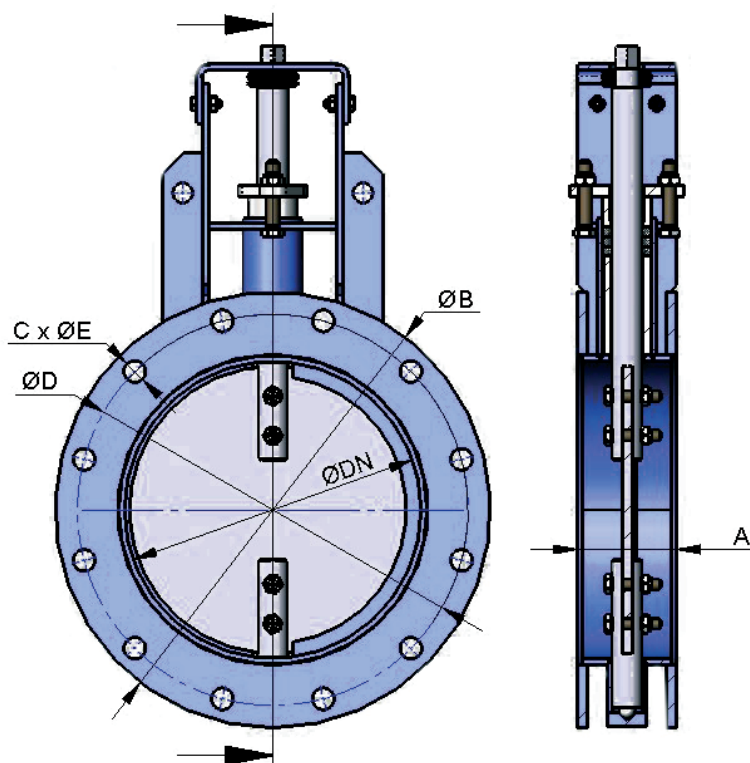


Fig. 38

Table 5

DAMPER BUTTERFLY VALVE PRESSURE LOSSES

Damper butterfly valves operate under a variety of working conditions. Consequently, while there may be minor variations in equipment designed for different projects, the essential design and concept of the valve are basically the same. Based on these details and drawing on decades of experience, **CMO Valves** has calculated a series of approximate load loss values (table 6) for the most common dimensions at various degrees of valve opening.

VALORES "Cv"	DN (mm)	SWING CHECK POSITION								
		90°	80°	70°	60°	50°	40°	30°	20°	10°
	80	473	363	272	160	89	56	34	16	1,9
	100	832	681	489	275	174	120	68	27	3,1
	125	1387	1187	777	448	289	173	99	39	5,8
	150	1859	1548	1012	593	367	234	128	57	6,7
	200	3323	2858	1861	1011	686	436	253	108	13
	250	5331	4628	2899	1696	1064	617	337	138	20
	300	8218	6827	4458	2598	1694	1101	609	237	32
	350	10609	8858	6031	3431	2112	1303	762	300	35
	400	14124	11674	7924	4459	2758	1789	1001	421	40
	450	17341	14533	10223	5992	3546	2124	1340	527	66
	500	22678	18321	12901	7364	4710	2828	1607	634	73
	550	27889	22918	15372	9046	5621	3526	2062	791	124
	600	33119	27536	17821	10742	6519	4218	2506	962	189
	650	39441	32828	21111	12563	7802	5016	2969	1131	241
	700	45780	38115	24369	14314	9093	5820	3427	1301	314
	750	52720	44589	28177	17103	11171	6556	3867	1591	352
	800	59659	51105	32006	19862	13252	7281	4304	1887	379
	850	67892	58655	36559	22159	14733	8202	4851	2098	443
	900	76113	66209	41136	24462	16223	9119	5386	2309	497
	950	89764	76298	47198	28202	18487	10967	6173	2563	588
	1000	103432	86422	53260	31925	20721	12821	6934	2817	668
	1050	111609	91060	56991	34107	21964	14036	7574	3146	697
	1100	119784	95681	60748	36265	23182	15231	8204	3459	732
	1200	133971	106190	71453	42997	27091	18314	10224	3902	848
1300	150862	122665	82176	48303	29985	19099	11043	4759	967	
1400	173295	142409	90461	54783	32209	20340	12098	5897	1039	

Tabla 6

***Note:** For load loss (Cv) for other sizes, check with **CMO valves**.

As part of its ongoing product and service improvement process, **CMO Valves** reserves the right to alter the data and content of this document at its discretion at any time without notice. The publication of the latest revision renders all previous documents invalid.

Installation and Maintenance Manual available at www.cmovalves.com.



www.cmovalves.com



CMOVALVES

QMS CERTIFIED BY LRQA
Approval number ISO9001 0035593

CMO VALVES
HEADQUARTERS MAIN
OFFICES & FACTORY

Amategi Aldea, 142
20400 Tolosa
Gipuzkoa (Spain)

Tel.: (+34) 943 67 33 99

cmo@cmovalves.com
www.cmovalves.com

CMO VALVES
MADRID

C/ Rumania, 5 - D5 (P.E. Inbisa)
28802 Alcalá de Henares
Madrid (Spain)

Tel.: (+34) 91 877 11 80

cmomadrid@cmovalves.com
www.cmovalves.com

CMO VALVES
FRANCE

5 chemin de la Brocardière
F-69570 DARDILLY
France

Tel.: (+33) 4 72 18 94 44

cmofrance@cmovalves.com
www.cmovalves.com