



CMO VALVES
manufacturing the valve you need



11A SERIES



FABRICATION RANGE *RESILIENT SEAT GATE VALVE RISING STEM*

UTILIZATION:

- Resilient seat gate valve, used for depuration and pumping of dirty waters, fire prevention systems, irrigation, industrial pipelines, etc.
- It has minimum head loss, and it is 100% watertight and full bore.

11 - SERIES

RESILIENT SEAT GATE VALVES RISING STEM



GENERAL FEATURES:


- Minimum head loss.
- Full bore.
- 100% watertight.
- Bidirectional flow.
- RF type PN 10/16 flanges.
- Guided gate to ensure the correct sealing.
- WRAS certificate for drinking water.
- Max. working pressure according to design pressure PN10/16.
- Working temperature between -10°C and 90°C.

STANDARDS APPLIED:

- Design according to DIN 3352.
- Hydrostatic tests according to EN 12266-1, class A.
- EC Directive.
- Distance between flanges according to EN 558 series 14.
- Side flanges according to ISO 7005-2.

DIMENSIONS

DN	L	H	H1	Weight Kg.
50	150	317	367	12,0
65	170	354	419	15,0
80	180	391	471	17,0
100	190	450	550	20,0
125	200	549	674	31,0
150	210	605	755	38,0
200	230	756	956	59,0
250	250	896	1146	97,0
300	270	1031	1311	125,0
350	290	1169	1519	182,0
400	310	1297	1697	227,0
450	330	1434	1884	323,0
500	350	1564	2064	473,0
600	390	1836	2436	668,0

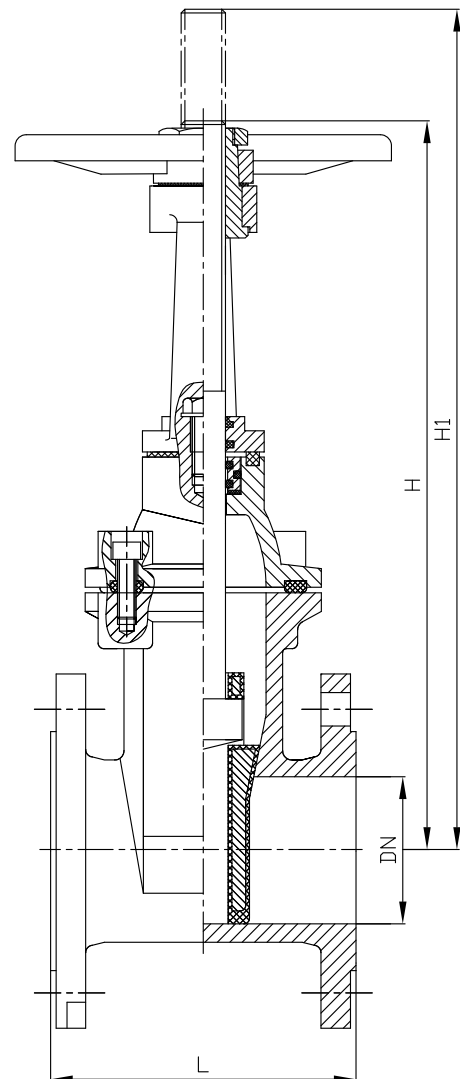

The images and drawings are non contractual.
The specifications of the shown products could vary without previous notice.

11 - SERIES

RESILIENT SEAT GATE VALVES
RISING STEM



DESCRIPTION

1	BODY	GJS500
2	WEDGE	GJS500+EPDM/NBR
3	STEM	AISI 420
4	BODY-BONNET GASKET	EPDM
5	O-RING	NBR
6	SEAL RING	BRASS
7	O-RING	NBR
8	BONNET	GJS500
9	DUST RING	NBR
10	WASHER	PA6
11	YOKE	GJS500
12	STEM NUT	BRASS
13	WASHER	PA6
14	HAND WHEEL	GJS500
15	LOCKING NUT	BRASS
	PAINTING RAL 5015	Epoxy 250 µm

