



CMO VALVES
manufacturing the valve you need

11A SERIES



FABRICATION RANGE

*RESILIENT SEAT GATE VALVE
NON RISING STEM*

UTILIZATION:

- Resilient seat gate valves, non rising stem, for fire fighting installations.
- Low head loss, full bore, 100% water tight and UL-FM certified.

11 - SERIES

RESILIENT SEAT GATE VALVES NON-RISING STEM



MAIN FEATURES:


- Low head loss
- 100% water tight.
- Bidirectional flow.
- Working pressure up to 16 bar.
- Working temperature between -10°C and 90°C.

STANDARDS APPLIED:

- Hidrostatic tests according to EN 12266-1, class A.
- CE Directive.
- UL-FM certified.

DESCRIPTION

1	BODY	GJS400-15
2	GATE	GJS400-15 + EPDM
3	CONNECTION NUT	Al-bronze C95400
4	SEALING JOINT	EPDM
5	STEM	AISI 304
6	BONNET	GJS400-15
7	RETENTION RING	Al-bronze C95400
8	O-RINGS	EPDM
9	TOP SQUARE	GJS400-15
10	WASHERS	STEEL
11	BOLTS	STEEL
12	BOLTS	STEEL
13	NUTS	STEEL
14	WASHERS	STEEL
15	TOP FLANGE	GJS400-15
16	PLATE	GJS400-15
17	BOLTS	STEEL
18	PLUG	Al-bronze C95400
	PAINTING	Epoxy 250 µm

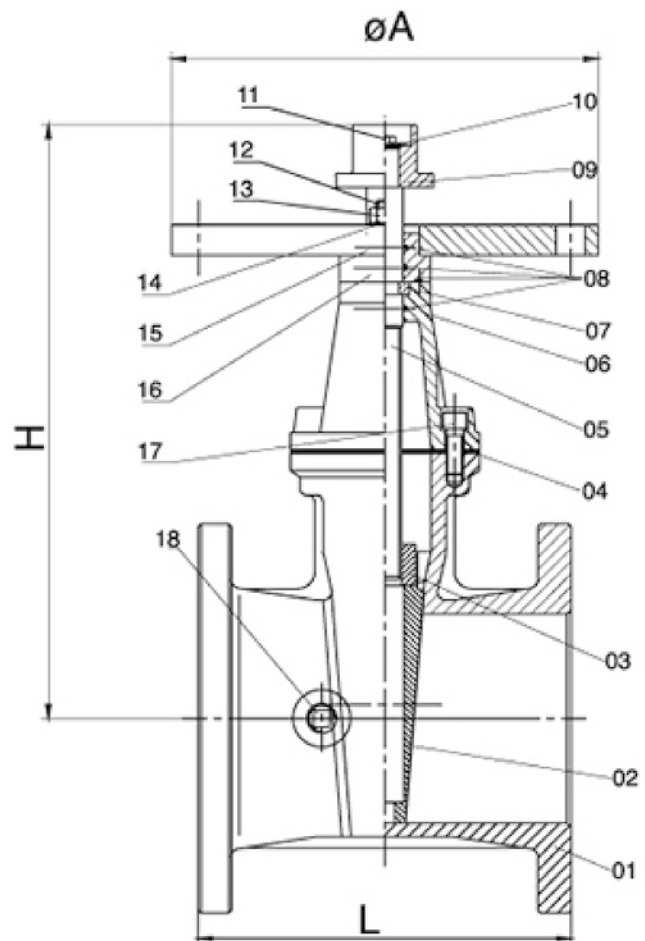

The images and drawings are non contractual.
The specifications of the shown products could vary without previous notice.

DIMENSIONS

DN	65	80	100	125	150	200	250	300
L	190	203	229	254	267	292	330	356
H	289	326	355	410	455	558	648	745
A	305	305	305	305	305	305	305	305